


Operations

This section is a set of scripts that are automatically executed clicking button.

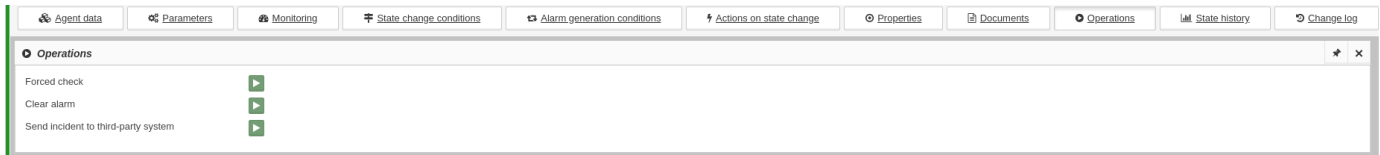

If you have rights, adding, editing and deleting operations for a particular object in End View.

Control buttons:



- execute operation;



- change operation;



- delete operation;



- add operation.

There are two operations types, depending on the choice of which the fields number and content to be filled in vary:

- [Program / script execution](#) runs executable file.

New operation ✕

Name:

Type:

Subtype:

Script:

Arguments:

Description:

- MQTT message sends a message using the MQTT protocol.

Change operation: Turn on climate control ✕

Name:

Type:

📡
MQTT message
▼

Topic:

Message:

Description:

Activation of the temperature setting in the living room on the first floor.

Save
Close

Fields description:

Field	Description in program / script	Description in MQTT
Name	Operation name displayed in web interface	
Type	Drop-down list with available operations types.	
Subtype	Drop-down list with available subtypes: <ul style="list-style-type: none"> Program/script in file system - previously created file stored in the server file system. Specify binary name or script full path. Script from repository - script created and added to system repository earlier. The script saved in repository is selected from the drop-down list. Script with text - manual script introduction. The script text is entered. 	
Topic		MQTT topic for message sending.
Message		MQTT message text.

Arguments	Arguments with which script is run. The field is filled as necessary.	
Description	Explanation a created operation.	

Addition default operations to the object class is available in the configuration window in [Object classes management](#) section.