


Objects and links settings - sections

In order to set an [object](#) or [link](#) up it is necessary to open the object or link in the [End view](#).


In the End view the set of sections is available. The panel with buttons at the top of the [Main screen](#) is designed to manage sections and access to information they provide in a fast way.

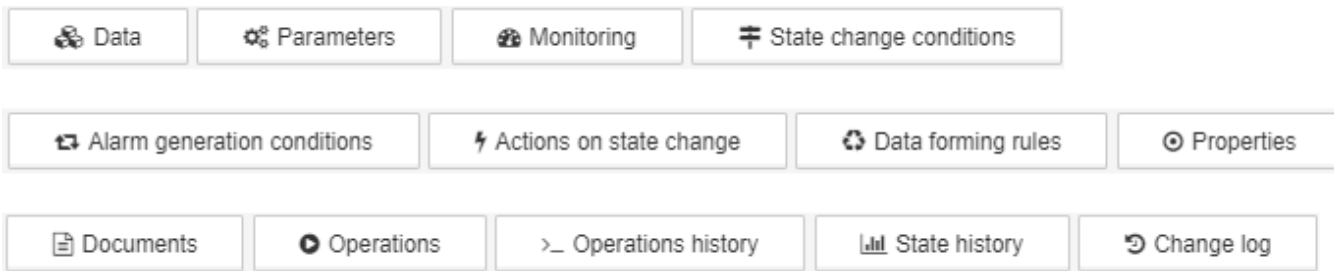

Clicking one of the buttons shows a pop-up window with the corresponding section:

The screenshot shows a pop-up window with a toolbar at the top containing icons for various sections. The main content is a table titled 'Data'. The table has a header row with columns: packetsTransmitted, packetsReceived, packetLossPercentile, numberOfErrors, numberOfDuplicates, roundTripMinimal, roundTripAverage, and roundTripMaximum. The data row shows values: 4, 4, 0, 0, 0, 0.734, 0.767, and 0.822. The table is titled 'Table for field: -- Not selected --' and has a 'Exact values' toggle set to 'NO'. There are also icons for copy, code, pin, and close.

packetsTransmitted	packetsReceived	packetLossPercentile	numberOfErrors	numberOfDuplicates	roundTripMinimal	roundTripAverage	roundTripMaximum
4	4	0	0	0	0.734	0.767	0.822

The button  at the top right corner of a pop-up section or the double-click on the header of the section pins/unpins the section to the page.

The names of the unpinned sections are underlined in the panel.

- Widgets
- Data
- Configuration files and directories modifications
- Object parameters
- Link parameters
- Manual state transition
- Monitoring
- State change conditions
- Actions on state changes
- Alarm generation conditions
- Data forming rules
- Properties
- Documents
- Operations
- Operations history
- State history
- Change log
- Graphs